
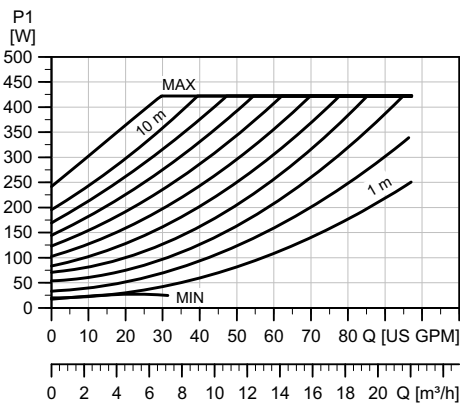
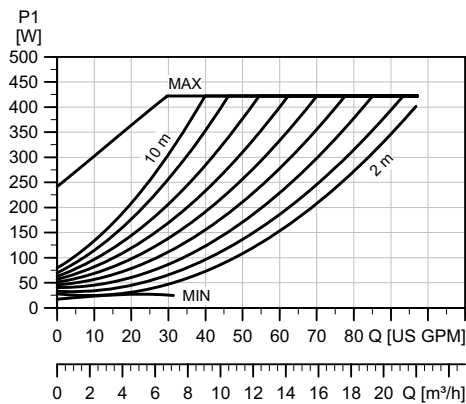
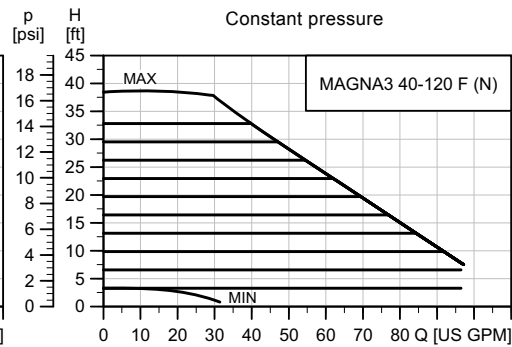


MAGNA3 40-120 F (N)

1 x 115 & 208-230 V, 50/60 Hz

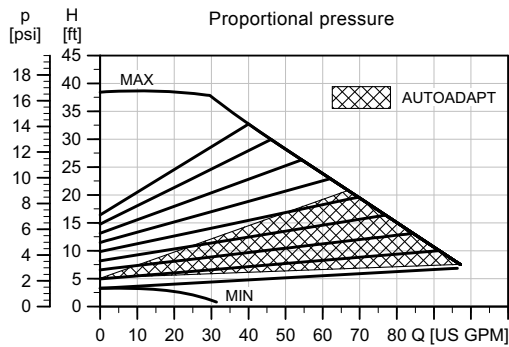


Speed	$I_{1/1}$ [A] 115 V	P1 [W] 115 V	$I_{1/1}$ [A] 230 V	P1 [W] 230 V
Min.	0.26	16	0.19	16
Max.	3.88	442	1.95	440

The pump incorporates overload protection.

Net weights [lbs (kg)]	Gross weights [lbs (kg)]	Ship. vol. [ft³ (m³)]
35 (15.9)	41 (18.7)	1.41 (0.04)

System pressure: Max. 175 psi (12 bar)
 Liquid temperature: 14 to 230 °F (-10 °C to +110 °C)
 Also available with: Stainless-steel pump housing, type N
 Specific EEI: 0.18

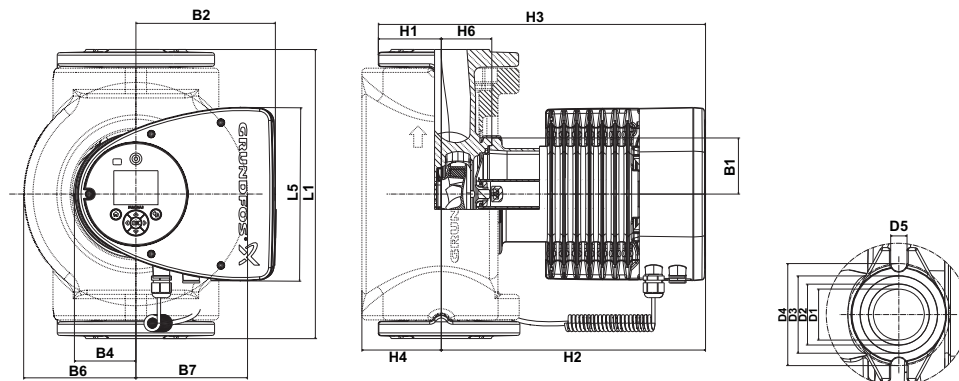

Pump type	Dimensions [in (mm)]							
MAGNA3 40-120 F (N)	L1	L5	B1	B2	B4	B6	B7	D1
	8.5 (216)	8.03 (204)	3.31 (84)	6.46 (164)	2.87 (73)	4.37 (111)	4.37 (111)	1.57 (40)
	D3	D4	D5	H1	H2	H3	H4	H6
	2.4 (60)	3.15 (80)	0.5 (12.8)	-	11.97 (304)	-	2.76 (70)	1.97 (50)

For product numbers, see page 7.